


Roulement conique 6455-6420-TIMKEN - 6455-6420-TIMKEN

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/6455-6420-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

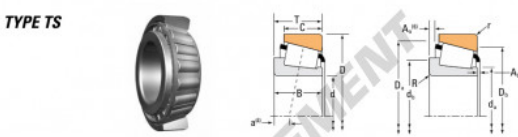

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|---------|---------|--|----------------------------|--|----------------------------|--------------------------|-------|-------------|------|
| Bore d | O.D. D | Width T | Dynamic ⁽¹⁾ C ₁ | Factor ⁽²⁾ Y | Dynamic ⁽³⁾ C ₂ | Factor ⁽⁴⁾ X | Static C ₀ | Inner | Outer | |
| mm | mm | mm | N | | N | | N | | | |
| 57.150 | 149.225 | 53.975 | 41100 | 2.30 | 10700 | 6600 | 1.61 | 46300 | 6455 | 6420 |
| 2.250 | 5.8750 | 2.125 | 5260 | | 2400 | 1480 | | 10400 | | |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight | |
|--------------------|---------|--------------------------|---|--------------------------------------|---|--------------------------------------|-------------------------------|-------------------------------|----------------|------------------|----------------|------|----------------|-------|
| Shaft | | Housing | | Cage | | | | | G ₁ | G ₂ | C ₃ | | | |
| Width B | Width C | ER. Dr. α ⁽¹⁾ | Max. Shaft Fillet Radius R ⁽²⁾ | Backing Shoulder Dia. d ₁ | Max. Housing Fillet Radius r ⁽³⁾ | Backing Shoulder Dia. D ₁ | A ₁ ⁽⁴⁾ | A ₂ ⁽⁵⁾ | | | | | | |
| 54.225 | 44.490 | -15.8 | 3.5 | 75.8 | 81.8 | 3.3 | 148.8 | 128.8 | 2.7 | 8.7 | 158.3 | 26.1 | 0.0051 | 5.89 |
| 2.1250 | 1.7500 | -0.58 | 0.14 | 2.95 | 3.19 | 0.13 | 5.51 | 5.08 | 0.10 | 0.03 | | | | 11.23 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952318219 |
| Diam. intérieur | 57.15 mm |
| Diam. extérieur | 149.225 mm |
| Épaisseur | 53.975 mm |
| Poids | 5180 g |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE