


Roulement conique 6380-6320-B-TIMKEN - 6380-6320-B-TIMKEN

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/6380-6320-b-timken>

TAPERED ROLLER BEARINGS
TYPE TSF

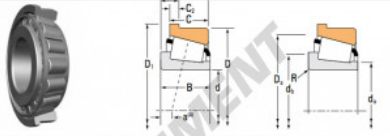

| Bearing Dimensions | | | | | | | Load Ratings | | | | | Part Number | |
|--------------------|-----------|------------|--|-----------------------------|---|-----------------------------|--------------------------|-------|--------|------|--------|-------------|--|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factors ⁽¹⁾ e | Dynamic ⁽²⁾ C ₀₂ | Factors ⁽²⁾ K | Static C ₀ | Inner | Outer | | | | |
| mm | mm | mm | N | | N | N | N | | | | | | |
| 54.813 | 135.755 | 56.007 | 321000 | 0.32 | 1.85 | 82000 | 46200 | 1.80 | 404000 | 6380 | 6320-B | | |
| 2.1580 | 5.3447 | 2.2050 | 72300 | | | 18700 | 10400 | | 90900 | | | | |

| Bearing Dimensions | | | | | | | Shaft | | | Housing | | Geometry Factors | | | Bearing Weight |
|--------------------|------------|-----------------------------|--|-----------------------------------|---|--|--|--|----------------|----------------|----------------|------------------|------|--|----------------|
| Width B | Width C | Eff. Dia. d ₁ | Outer Ring Ridge O.D. D ₁ | Flange Width C ₁ | Max Shaft File Radius (R ⁽¹⁾) | Sealing Shoulder Dia. d ₂ | Sealing Shoulder Dia. d ₃ | Sealing Shoulder Dia. D ₁ | G ₁ | G ₂ | C ₀ | | kg | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | | | | | lbs. | | |
| 56.007 | 44.458 | -15.3 | 143.978 | 7.258 | 0.5 | 70.6 | 71.9 | 126.8 | 123.5 | 22.4 | 0.9827 | 4.16 | 9.25 | | |
| 2.2050 | 1.7508 | -0.78 | 5.6927 | 0.2725 | 0.02 | 2.78 | 2.86 | 4.99 | | | | | | | |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952337845 |
| Diam. intérieur | 54.813 mm |
| Diam. extérieur | 135.755 mm |
| Épaisseur | 56.007 mm |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE