


Roulement conique 567A-563-B-TIMKEN - 567A-563-B-TIMKEN

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/567a-563-b-timken>

TAPERED ROLLER BEARINGS
TYPE TSF

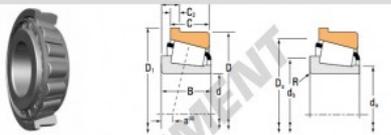

| Bearing Dimensions | | | | | | | Load Ratings | | | | | Part Number | |
|--------------------|-----------|------------|--|-----------------------------|---|-----------------------------|--------------------------|-------|--------|------|-------|-------------|--|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factors ⁽¹⁾ e | Dynamic ⁽²⁾ C ₀₂ | Factors ⁽²⁾ K | Static C ₀ | Inner | Outer | | | | |
| mm | mm | mm | N | | N | N | N | | | | | | |
| 71.437 | 127.000 | 14.200 | 190000 | 0.26 | 1.85 | 30000 | 31300 | 1.81 | 262000 | 567A | 563-B | | |
| 2.8125 | 5.0000 | 0.5625 | 44100 | | 11400 | 7130 | 38900 | | | | | | |

| Bearing Dimensions | | | | | | | Shaft | | Housing | | Geometry Factors | | | Bearing Weight |
|--------------------|------------|-----------------------------|--|-----------------------------------|--|--|--|----------------|----------------|----------------|------------------|--|------|----------------|
| Width B | Width C | Eff. Dia. d ₁ | Outer Ring Ridge O.D. D ₁ | Flange Width C ₁ | Max Shaft File Radius R ⁽¹⁾ | Seaking Shoulder Dia. d ₂ | Seaking Shoulder Dia. D ₁ | G ₁ | G ₂ | C ₁ | | | kg | |
| mm | mm | mm | mm | mm | mm | mm | mm | | | | | | lbs. | |
| 36.110 | 28.375 | -4.1 | 123.240 | 6.350 | 3.3 | 86.0 | 125.0 | 101.3 | 24.6 | 0.1167 | | | 1.56 | |
| 1.4240 | 1.1250 | -0.32 | 5.2480 | 0.2500 | 0.14 | 3.15 | 3.38 | 4.78 | | | | | 4.23 | |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952338774 |
| Diam. intérieur | 71.437 mm |
| Diam. extérieur | 127 mm |
| Épaisseur | 36.17 mm |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE