


## Roulement à aiguilles GBRI102216-UU-IKO - GBRI102216-UU-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/aiguilles/gbri102216-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

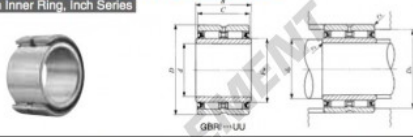

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
15.875 ( $\frac{5}{8}$ )	GBRI 102216 UU		127	15.875 ( $\frac{5}{8}$ )	34.925 ( $1\frac{1}{4}$ )	25.400 (1)			
B	F <sub>w</sub>	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min.	Max.	D <sub>s</sub> Max.					r <sub>as max</sub> <sup>(1)</sup>
25.650	22.225 ( $\frac{7}{8}$ )	21	21.2	30	0.6	28 600	40 100	3 500	LRBZ 101416

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383316
Diam. intérieur	15.875 mm
Diam. extérieur	34.925 mm
Épaisseur	25.4 mm
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE