


Roulement à aiguilles GBRI223520-UU-IKO - GBRI223520-UU-IKO

https://www.123roulement.ch/roulement-palier/roulement-aiguilles/aiguilles/gbri223520-uu-iko

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

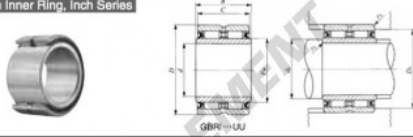

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		d	D	C
34.925 (1 3/8)	GBRI 223520 UU		311	34.925 (1 3/8)	55.562 (2 1/8)	31.750 (1 1/4)

B	F _w	Standard mounting dimensions mm			r _{as max} ⁽¹⁾	Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring
		Min.	Max.	D _s Max.					
32.000	41.275 (1 5/8)	40.2	40.2	50.5	0.6	56 600	105 000	1 900	LRBZ 222620

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383439
Diam. intérieur	34.925 mm
Diam. intérieur	1 3/8" inch
Diam. extérieur	55.562 mm
Diam. extérieur	2 3/16" inch
Epaisseur	31.75 mm
Epaisseur	1 1/4" inch
Conditionnement	1

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE