


## Roulement à aiguilles GBR1243720-UU-IKO - GBR1243720-UU-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/aiguilles/gbri243720-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

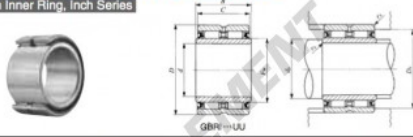

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
<b>38.100</b> (1 1/2)	<b>GBR1 243720 UU</b>		330	38.100 (1 1/2)	58.738 (2 1/4)	31.750 (1 1/4)			
B	F <sub>w</sub>	Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring		
		d <sub>s</sub> Min.	d <sub>s</sub> Max.					D <sub>s</sub> Max.	r <sub>as</sub> max. <sup>(1)</sup>
32.000	44.450 (1 3/4)	43.3	43.4	53.7	0.6	58 900	114 000	1 800	LRBZ 242820

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383446
Diam. intérieur	38.1 mm
Diam. extérieur	58.738 mm
Épaisseur	31.75 mm
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE