


Roulement à aiguilles GBRI446828-U-IKO - GBRI446828-U-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/aiguilles/gbri446828-u-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

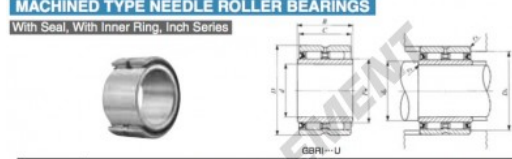

| Shaft dia. mm (inch) | Identification number | | Mass (Ref.) g | Boundary dimensions mm(inch) | | | | | |
|----------------------------|-----------------------|---------------------------------|---------------------|------------------------------|---------------------------------------|--|--|----------------------|-------------|
| | With two seals | With one seal | | d | D | C | | | |
| 69.850 (2 3/4) | GBRI 446828 U | | 1 490 | 69.850 ± 0.010 | 107.950 ± 0.010 | 44.450 ± 0.010 | | | |
| B | F_w | Standard mounting dimensions mm | | | Basic dynamic load rating C N | Basic static load rating C_0 N | Allowable rotational speed ⁽²⁾ rpm | Assembled inner ring | |
| | | Min. | Max. | $r_{as max}$ ⁽¹⁾ | | | | | |
| 44.700 | 82.550 ± 0.010 | 77 | 79 | 99.9 | 1.5 | 127 000 | 231 000 | 950 | LRBZ 446228 |

Notes: (1) Minimum allowable value of chamfer dimension r .
(2) Allowable rotational speed applies to grease lubrication.
Remark: This roller ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3663952383583 |
| Diam. intérieur | 69.85 mm |
| Diam. extérieur | 107.95 mm |
| Épaisseur | 44.45 mm |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE