


Roulement à aiguilles GBRI487232-UU-IKO - GBRI487232-UU-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/aiguilles/gbri487232-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

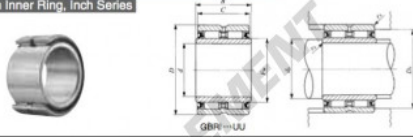

| Shaft dia. mm (inch) | Identification number | | Mass (Ref.) g | Boundary dimensions mm(inch) | | | | | |
|----------------------------|-----------------------|---------------------------------|---------------------|------------------------------|-------------------------------------|---|--|----------------------|-------------------------------------|
| | With two seals | With one seal | | d | D | C | | | |
| 76.200 (3) | GBRI 487232 UU | | 1 880 | 76.200 (3) | 114.300 (4 1/2) | 50.800 (2) | | | |
| B | F _w | Standard mounting dimensions mm | | | Basic dynamic load rating C N | Basic static load rating C ₀ N | Allowable rotational speed ⁽²⁾ rpm | Assembled inner ring | |
| | | Min. d _s | Max. d _s | D _s Max. | | | | | r _{as} max. ⁽¹⁾ |
| 51.050 | 88.900 (3 1/2) | 83.5 | 86 | 106.3 | 1.5 | 170 000 | 347 000 | 900 | LRBZ 485632 |

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remark: This roller ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3663952383606 |
| Diam. intérieur | 76.2 mm |
| Diam. extérieur | 114.3 mm |
| Épaisseur | 50.8 mm |
| Conditionnement | 1 |
| Norme | Sans norme |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE