


## Roulement à aiguilles GBR1608432-U-IKO - GBR1608432-U-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/aiguilles/gbri608432-u-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

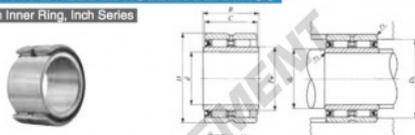

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
95.250 (3 3/4)	GBR1 608432 U		2 260	95.250 ± 0.010	133.350 ± 0.010	50.800 ± 0.010			
B	F <sub>w</sub>	Standard mounting dimensions mm		Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring		
		d <sub>4</sub> Min.	d <sub>4</sub> Max.					D <sub>4</sub> Max.	r <sub>as max</sub> <sup>(1)</sup>
51.050	107.950 ± 0.010	103	105	125.3	1.5	186 000	419 000	750	LRBZ 606832

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383668
Diam. intérieur	95.25 mm
Diam. intérieur	3 3/4" inch
Diam. extérieur	133.35 mm
Diam. extérieur	5 1/4" inch
Epaisseur	50.8 mm
Epaisseur	2" inch
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE