


Rotule GE SBB56-2RS-IKO - SBB56-2RS-IKO

<https://www.123roulement.ch/roulement-palier/rotule/ge/sbb56-2rs-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

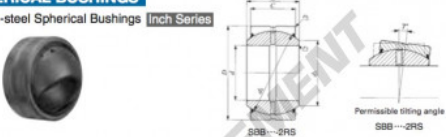

| Shaft dia. mm (inch) | Identification number | | Mass (Ref.) kg | Boundary dimensions mm(inch) | | | |
|----------------------------|---------------------------------|-------------------|---------------------------|--|-------------------------------------|------------------------------------|---------------|
| | Without seal | With seals | | d | D | B | C |
| 88.900 (3 1/2) | | SBB 56-2RS | 4.83 | 88.900 (3 1/2) | 139.700 (5 1/2) | 77.77 (3.062) | 66.68 (2.625) |
| d_k | Radial internal clearance mm | | Mounting dimensions mm | | Dynamic load capacity C_d N | Static load capacity C_s N | |
| | Min. | Max. | d_1 | r_1 max. (⁽¹⁾) Max. | | | |
| 128(5.039) | 0.13 | 0.23 | 101.6 | 0.6 | 0.8 | 837 000 | 5 020 000 |

Notes: (1) Minimum allowable value of chamfer dimensions r_1 and r_2 .
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k .
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3663952392974 |
| Diam. intérieur | 88.9 mm |
| Diam. extérieur | 139.7 mm |
| Épaisseur | 77.77 mm |
| Type | GE |
| Lubrification | sans |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE