


## Rotule GE SBB64-IKO - SBB64-IKO

<https://www.123roulement.ch/roulement-palier/rotule/ge/sbb64-iko>

**IKO**  
**SPHERICAL BUSHINGS**  
Steel-on-steel Spherical Bushings Inch Series

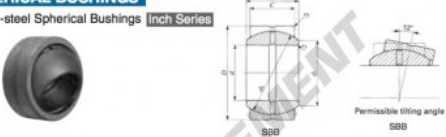

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
101.600 (4)	SBB 64		7.07	101.600 (4)	158.750 (6 1/4)	88.90 (3.500)	76.20 (3.000)
Radial internal clearance d <sub>k</sub> mm	Mounting dimensions mm		Dynamic load capacity C <sub>d</sub> N	Static load capacity C <sub>s</sub> N			
	Min.	Max.		d <sub>1</sub>	r <sub>1</sub> max. (°)	r <sub>2</sub> max. (°)	
146 (5.748)	0.13	0.23	115.8	0.6	0.8	1 090 000	6 550 000

Notes: (1) Minimum allowable value of chamfer dimensions r<sub>1</sub> and r<sub>2</sub>.  
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d<sub>k</sub>.  
Remark 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.  
2. Not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952393001
Diam. intérieur	101.6 mm
Diam. extérieur	158.75 mm
Épaisseur	88.9 mm
Type	GE
Lubrification	sans
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE