


Galet de came avec axe CFES10-R-IKO - CFES10-R-IKO

<https://www.123roulement.ch/roulement-palier/roulement-bille/galet-came-axe/cfes10-r-iko>

IKO
CAM FOLLOWERS
Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

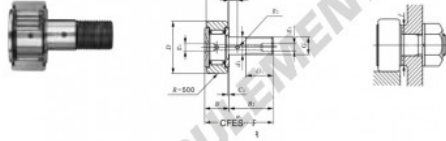

| Stud dia. mm | Identification number | | | | Mass (Ref.) | | | |
|-----------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------|----|----|----------------|
| | Shield type | | Sealed type | | g | D | C | d ₁ |
| | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | | | | |
| 10 | CFES 10 R | | | | 45 | 22 | 12 | 10 |

| Boundary dimensions mm | | | | | | | | | | Eccentricity E | Mounting dimension f Min. mm | Maximum tightening torque N·m | Ball dynamic load rating C N | Ball static load rating C ₀ N | Maximum allowable static load N |
|------------------------|----------------|------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-------------------|------------------------------------|----------------------------------|------------------------------------|--|------------------------------------|
| G | G ₁ | B | B ₁ | B ₂ | B ₃ | C ₁ | B ₁ | B ₂ | B ₃ | | | | | | |
| M10×1.25 | 12 | 13.2 | 36.2 | 23 | | 0.6 | *4 | | 0.3 | 0.3 | 16 | 13.8 | 5 430 | 6 890 | 6 890 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3616060459121 |
| Diam. intérieur | 10 mm |
| Diam. extérieur | 22 mm |
| Epaisseur | 12 mm |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE