


## Roulement à rouleaux NN3022K-JTEKT - NN3022K-KOYO

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/rouleaux/nn3022k-koyo>

### Double-row cylindrical roller bearings

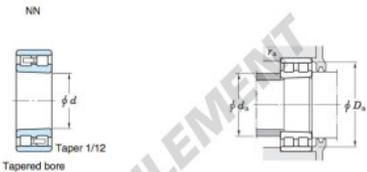

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>F<sub>02</sub></i>	<i>C<sub>02</sub></i>	<i>C<sub>07</sub></i>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
110	170	45	2	155	221	361	3 500	4 200		<b>NN3022K</b>

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d<sub>a</sub></i>		<i>D<sub>a</sub></i>		<i>r<sub>a</sub></i>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		119	—	—	161	157	2	3.55	3.56

## CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473062
Diam. intérieur	110 mm
Diam. extérieur	170 mm
Épaisseur	45 mm
Poids	3560 g
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE