


Rotule TAPR GIHR-K25-DO-DURBAL - GIHR-K25-DO-DURBAL

<https://www.123roulement.ch/roulement-palier/rotule/tapr/gihr-k25-do-durbal>

GIHR-K25-DO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

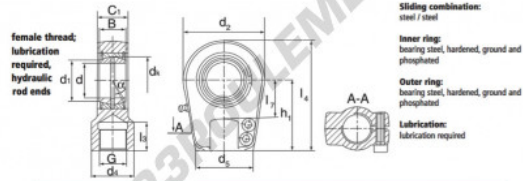

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and phosphated
Outer ring:
bearing steel, hardened, ground and phosphated
Lubrication:
lubrication required

| order number | d | d ₁ | G | d ₂ | d ₃ | B | C ₁ | d ₂ |
|--------------|----|----------------|------------|----------------|----------------|----|----------------|----------------|
| GIHR-K 25 DO | 25 | 29,3 | M 16 x 1,5 | 25 | 46 | 20 | 23 | 56 |

| type | l ₁ min | l ₂ min | h | l ₄ | d ₄ | α [°] | load rating C ₀ [N] | weight [kg] |
|-----------------------|--------------------|--------------------|----|----------------|----------------|-------|--------------------------------|-------------|
| GIHR-K / GIHL-K 25 DO | 17 | 28 | 50 | 80,0 | 35,5 | 7 | 72 | 0,48 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|-------------------|
| Marque | DURBAL |
| N° Ean13 | 3663952499031 |
| Diam. intérieur | 25 mm |
| Diam. intérieur | 0.984" inch |
| Diam. extérieur | 56 mm |
| Diam. extérieur | 2.205" inch |
| Epaisseur | 23 mm |
| Epaisseur | 0.906" inch |
| Type | TAPR |
| Poids | 480 g |
| Filetage | Filetage à droite |
| Lubrification | avec |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE