

Rotule SI

BRTF30-01-502-DURBAL - BRTF30-01-502-DURBAL

<https://www.123roulement.ch/roulement-palier/rotule/si/brtf30-01-502-durbal>

BRTF30-01-502



rod end housing:
forged steel, case-hardened bearing race, superfinished, surface galvanized, free of Cr VI

inner ring:
ball bearing steel, hardened, superfinished

lubrication:
aluminium complex soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1


lubrication fitting:
DIN 71 412 H1

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

DURBAL® heavy-duty rod ends with integral self-aligning roller bearing

female thread:
long-term lubrication, low maintenance, shields, adapter sizes according to DIN ISO 12240-4, series K

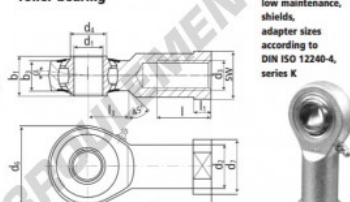

order number		measurements [mm]										
type	right hand thread	left hand thread	d ₁	d ₂	d ₃	d ₄	d ₅	d ₆	d ₇	h ₁	b ₂	
BRTF 30 -01		502	30	40,0	M 30 x 2	34,5	70	50	37	25		
		measurements [mm]					weight	rotational speed limit	basic load rating			
type	h	l	l ₁	l ₃	SW	α [°]	[kg]	n _{max} [min ⁻¹]	C [N]	stat. C ₀ [N]		
BRTF 30	110	51	15,0	35	41	7,5	1,000	450	32500	24850		

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952506913
Diam. intérieur	30 mm
Diam. extérieur	70 mm
Epaisseur	37 mm
Type	SI
Poids	1000 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE