


Rotule SA BRM16-00-501-DURBAL - BRM16-00-501-DURBAL

<https://www.123roulement.ch/roulement-palier/rotule/sa/brm16-00-501-durbal>

BRM16-00-501

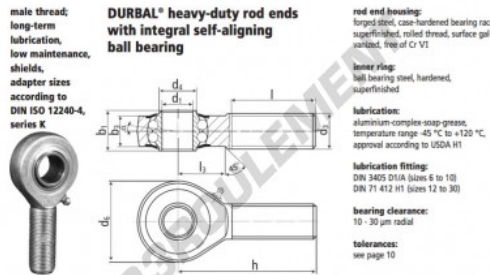

male thread:
long-term
lubrication,
low maintenance,
shields,
adapter sizes
according to
DIN ISO 12240-4,
series K

**DURBAL® heavy-duty rod ends
with integral self-aligning
ball bearing**

rod end housing:
forged steel, case-hardened bearing race,
superfinished, rolled thread, surface gal-
vanized, forged Cr-V

inner ring:
ball bearing steel, hardened,
superfinished

lubrication:
aluminum-complex-soap-grease,
temperature range -45 °C to +120 °C,
approval according to USDA H1

lubrication fitting:
DIN 2455 D1/A (sizes 6 to 10)
DIN 21 412 H1 (sizes 12 to 30)

bearing clearance:
10 - 30 µm radial
tolerances:
see page 10

order number		measurements [mm]									
Type	right hand thread	left hand thread	d ₁	d ₂	d ₄	d ₅	b ₁	b ₂	h		
BRM 16 -00 -501			16	M 16	19,0	42	21	15,0	66		
measurements [mm]		weight		calculation factors		rotational speed limit		basic load rating			
Type	l	l ₃	α [°]	[kg]	Y	v ₀	lim. [min]	C [N]	stat. C ₀ [N]		
BRM 16	40	22	8,0	0,190	2,24	2,35	975	6250	2350		

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952507033
Diam. intérieur	16 mm
Diam. extérieur	42 mm
Epaisseur	21 mm
Type	SA
Poids	190 g
Filetage	Filetage à droite
Lubrification	avec
Conditionnement	-
Norme	Sans norme

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE