Rotule SA
PM06-02-502-DURBAL - PM06-02-502-DURBAL

https://www.123roulement.ch/roulement-palier/rotule/sa/pm06-02-502-durbal

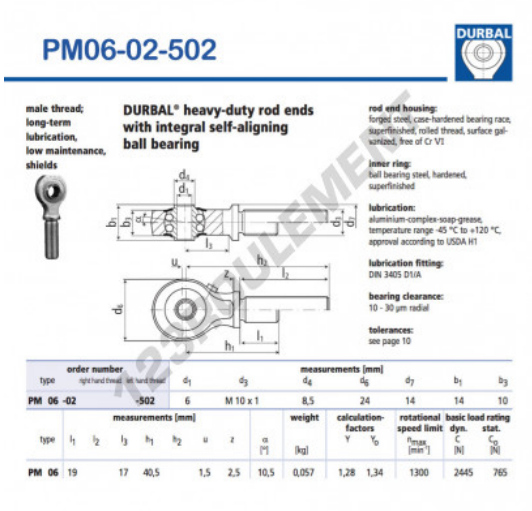

PM06-02-502

DURBAL

male thread; long-term lubrication, low maintenance, shields

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing

rod end housing: forged steel, case-hardened bearing race, superfinished, rolled thread, surface gal-vanized, free of Cr VI

inner ring: ball bearing steel, hardened, superfinished

lubrication: aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

lubrication fitting: DIN 3405 D1/A

bearing clearance: 10 - 30 µm radial

tolerances: see page 10

type	order number right hand thread	left hand thread	measurements [mm] d_1	d_3	d_4	d_6	d_7	b_1	b_3
PM 06	-02	-502	6	M 10 x 1	8,5	24	14	14	10

type	measurements [mm] l_1	l_2	l_3	h_1	h_2	u	z	α [°]	weight [kg]	calculation-factors Y	Y_0	rotational speed limit n_{max} [min⁻¹]	basic load rating dyn. C [N]	stat. C_0 [N]
PM 06	19		17	40,5		1,5	2,5	10,5	0,057	1,28	1,34	1300	2445	765

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952507484
Diam. intérieur	6 mm
Diam. extérieur	24 mm
Epaisseur	14 mm
Type	SA
Poids	57 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

contact@123roulement.ch
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE