Rotule SI
BRF20-60-502-DURBAL - BRF20-60-502-DURBAL

https://www.123roulement.ch/roulement-palier/rotule/si/brf20-60-502-durbal

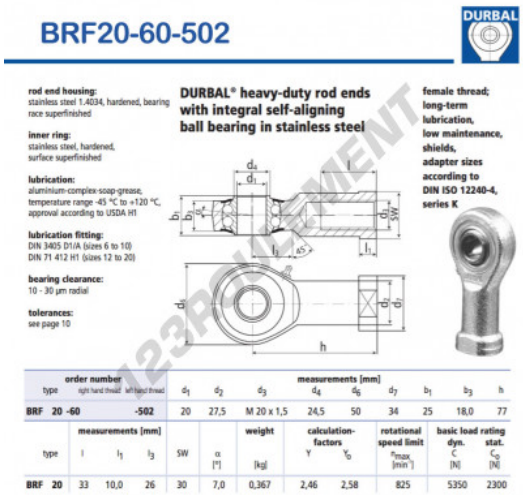

BRF20-60-502

DURBAL

rod end housing:
stainless steel 1.4034, hardened, bearing race superfinished

inner ring:
stainless steel, hardened, surface superfinished

lubrication:
aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

lubrication fitting:
DIN 3405 D1/A (sizes 6 to 10)
DIN 71 412 H1 (sizes 12 to 20)

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing in stainless steel

female thread; long-term lubrication, low maintenance, shields, adapter sizes according to DIN ISO 12240-4, series K

order number type	right hand thread	left hand thread	d_1	d_2	d_3	d_4	d_6	d_7	b_1	b_3	h
BRF 20	-60	-502	20	27,5	M 20 x 1,5	24,5	50	34	25	18,0	77

type	l	l_1	l_3	SW	α [°]	weight [kg]	Y	Y_0	n_{max} [min⁻¹]	C [N]	C_0 [N]
BRF 20	33	10,0	26	30	7,0	0,367	2,46	2,58	825	5350	2300

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952509303
Diam. intérieur	20 mm
Diam. intérieur	0.787" inch
Diam. extérieur	50 mm
Diam. extérieur	1.969" inch
Epaisseur	25 mm
Epaisseur	0.984" inch
Type	SI
Poids	367 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

contact@123roulement.ch
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE