Accessoire de palier
7608-DL-NICE - 7608-DL-NICE

https://www.123roulement.ch/roulement-palier/paliers/accessoires/7608-dl-nice

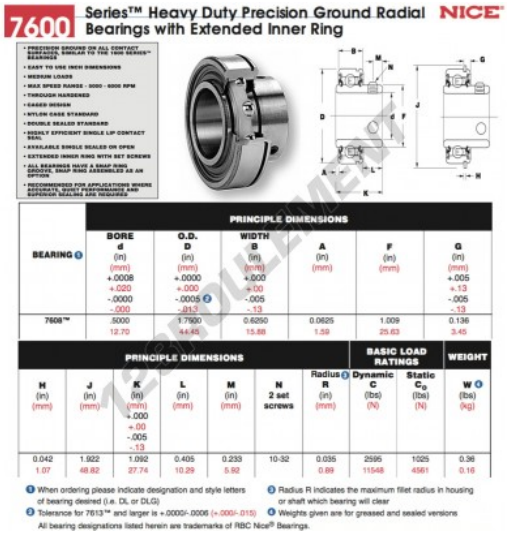

7600 Series™ Heavy Duty Precision Ground Radial Bearings with Extended Inner Ring — NICE

- PRECISION GROUND ON ALL CONTACT SURFACES, SIMILAR TO THE 1600 SERIES™ BEARINGS
- EASY TO USE INCH DIMENSIONS
- MEDIUM LOADS
- MAX SPEED RANGE - 3000 - 6000 RPM
- THROUGH HARDENED
- CAGED DESIGN
- NYLON CAGE STANDARD
- DOUBLE SEALED STANDARD
- HIGHLY EFFICIENT SINGLE LIP CONTACT SEAL
- AVAILABLE SINGLE SEALED OR OPEN
- EXTENDED INNER RING WITH SET SCREWS
- ALL BEARINGS HAVE A SNAP RING GROOVE, SNAP RING ASSEMBLED AS AN OPTION
- RECOMMENDED FOR APPLICATIONS WHERE HIGH SPEED, HIGH LOADS AND SUPERIOR SEALING ARE REQUIRED

BEARING [1]	PRINCIPLE DIMENSIONS					
	BORE d (in) (mm) +.0008 +.020 -.0000 -.000	O.D. D (in) (mm) +.0000 +.000 -.0005 [2] -.013	WIDTH B (in) (mm) +.000 +.00 -.005 -.13	A (in) (mm)	F (in) (mm)	G (in) (mm) +.005 +.13 -.005 -.13
7608™	.5000 12.70	1.7500 44.45	0.6250 15.88	0.0625 1.59	1.009 25.63	0.136 3.45

PRINCIPLE DIMENSIONS							BASIC LOAD RATINGS		WEIGHT
H (in) (mm)	J (in) (mm)	K (in) (mm) +.000 +.00 -.005 -.13	L (in) (mm)	M (in) (mm)	N 2 set screws	Radius [3] R (in) (mm)	Dynamic C (lbs) (N)	Static C_0 (lbs) (N)	W [4] (lbs) (kg)
0.042 1.07	1.922 48.82	1.092 27.74	0.405 10.29	0.233 5.92	10-32	0.035 0.89	2595 11548	1025 4561	0.36 0.16

[1] When ordering please indicate designation and style letters of bearing desired (i.e. DL or DLG)
[2] Tolerance for 7613™ and larger is +.0000/-.0006 (+.000/-.015)
[3] Radius R indicates the maximum fillet radius in housing or shaft which bearing will clear
[4] Weights given are for greased and sealed versions
All bearing designations listed herein are trademarks of RBC Nice® Bearings.

CARACTÉRISTIQUES PRODUIT

Marque	NICE
N° Ean13	3616060473394
Diam. intérieur	12.7 mm
Diam. extérieur	25.63 mm
Epaisseur	15.88 mm
Poids	160 g
Conditionnement	1

contact@123roulement.ch
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE