


Douille à aiguilles BA3216-Z-IKO - BA3216-Z-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/douille/ba3216-z-iko>

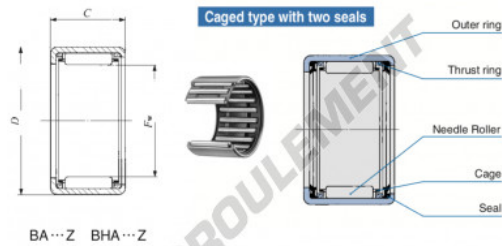

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
F_w	D	C	Start dia.	End dia.	Mounting bore dia.	C	C_0	rpm		
	Max.	Max.	Min.	Max.	Min.	N	N			
50.800 (2)	60.325 (2.4 # 6)	25.40 (1.000)	2.6			37100	76500	6000	RB 2818	

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060601582
Diam. intérieur	50.8 mm
Diam. extérieur	60.325 mm
Épaisseur	25.4 mm
Vitesse limite	6000 rpm
Charge dynamique	37.1 kN
Charge statique	76.5 kN
Conditionnement	1

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE