


## Douille à aiguilles BA77-Z-IKO - BA77-Z-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/douille/ba77-z-iko>

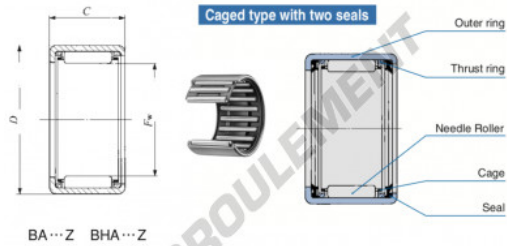

| Boundary dimensions mm(inch) |        |       | Standard mounting dimensions mm |                 |                        |       | Basic dynamic load rating |      | Basic static load rating |       | Allowable relative speed(1) | Assembled inner ring |
|------------------------------|--------|-------|---------------------------------|-----------------|------------------------|-------|---------------------------|------|--------------------------|-------|-----------------------------|----------------------|
| $F_w$                        | $D$    | $C$   | $d$                             | Shaft dia. min. | Housing bore dia. max. | $d_f$ | Min.                      | $C$  | $C_0$                    | N     | N                           | rpm                  |
| 11.112                       | 15.875 | 11.13 | 11.151                          | 4.38            | 1                      |       |                           | 4150 | 4680                     | 35000 |                             |                      |

### CARACTÉRISTIQUES PRODUIT

|                  |               |
|------------------|---------------|
| Marque           | IKO           |
| N° Ean13         | 3616060603012 |
| Diam. intérieur  | 11.112 mm     |
| Diam. extérieur  | 15.875 mm     |
| Epaisseur        | 11.13 mm      |
| Vitesse limite   | 35000 rpm     |
| Charge dynamique | 4.15 kN       |
| Charge statique  | 4.68 kN       |
| Conditionnement  | 1             |

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE