


## Roulement à rouleaux NN3024K-JTEKT - NN3024K-JTEKT

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/rouleaux/nn3024k-jtekt>

Double-row cylindrical roller bearings 

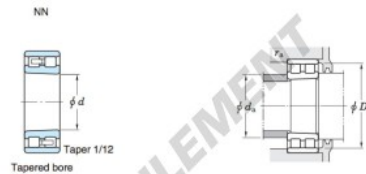

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>F<sub>w</sub></i>	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
120	180	46	2	165	232	392	3 200	3 900		NN3024K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d<sub>a</sub></i>		<i>D<sub>a</sub></i>		<i>r<sub>a</sub></i>	Cylindrical bore	Tapered bore	
		min.	max.	min.	max.				
		129	—	—	171	167	2	4.00	3.87

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473109
Diam. intérieur	120 mm
Diam. extérieur	180 mm
Épaisseur	46 mm
Poids	3870 g
Conditionnement	1
Norme	Sans norme

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE