


Roulement à rouleaux NNU4920K-JTEKT - NNU4920K-JTEKT

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/rouleaux/nnu4920k-jtekt>

Double-row cylindrical roller bearings Koyo

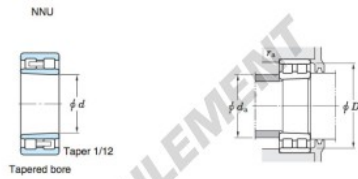

| Boundary dimensions (mm) | | | | Basic load ratings (kN) | | | | Limiting speeds (min ⁻¹) | | Bearing No. | |
|--------------------------|-----|----|-----|-------------------------|-----------------|-----------------|-----------------|--------------------------------------|----------|------------------|--------------|
| d | D | B | r | F ₀₂ | E ₀₂ | C ₀₇ | C ₀₇ | Grease lub. | Oil lub. | Cylindrical bore | Tapered bore |
| 100 | 140 | 40 | 1.1 | 113 | — | 139 | 258 | 4 000 | 4 800 | | |

| Mounting dimensions (mm) | | Mounting dimensions (mm) | | | | (Refer.) Mass (kg) | | |
|--------------------------|------|--------------------------|---------------------|---------------------|---------------------|--------------------|--------------|------|
| min. | max. | d _a min. | d _a max. | D _a min. | D _a max. | Cylindrical bore | Tapered bore | |
| | | 106.5 | 111 | 115 | 133.5 | — | 1.95 | 1.87 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | JTEKT |
| N° Ean13 | 3663952473833 |
| Diam. intérieur | 100 mm |
| Diam. extérieur | 140 mm |
| Épaisseur | 40 mm |
| Poids | 1870 g |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE