


Roulement à rouleaux NN3020K-JTEKT - NN3020K-JTEKT

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/rouleaux/nn3020k-jtekt>

Double-row cylindrical roller bearings

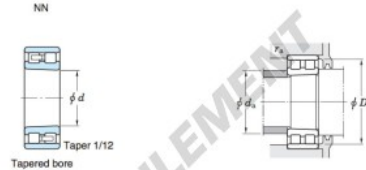

| Boundary dimensions (mm) | | | | Basic load ratings (kN) | | | Limiting speeds (min ⁻¹) | | Bearing No. | |
|--------------------------|-----|-----|-------------|-------------------------|-------|----------|--------------------------------------|----------|---------------------|-----------------|
| d | D | B | r min. | F_w | C_r | C_{0r} | Grease lub. | Oil lub. | Cylindrical bore | Tapered bore |
| 100 | 150 | 37 | 1.5 | 137 | 157 | 265 | 3 900 | 4 700 | | NN3020K |

| | | Mounting dimensions (mm) | | | | | (Refer.) Mass (kg) | |
|---------------------|-----------------|--------------------------|------|-------|------|-------|---------------------|-----------------|
| Cylindrical bore | Tapered bore | d_a | | D_a | | r_a | Cylindrical bore | Tapered bore |
| | | min. | max. | min. | max. | | | |
| | | 108 | — | 142 | 139 | 1.5 | 2.28 | 2.21 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | JTEKT |
| N° Ean13 | 3663952473857 |
| Diam. intérieur | 100 mm |
| Diam. extérieur | 150 mm |
| Épaisseur | 37 mm |
| Poids | 2210 g |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE