Roulement conique
46790A-46720-TIMKEN - 46790A-46720-TIMKEN

https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/46790a-46720-timken

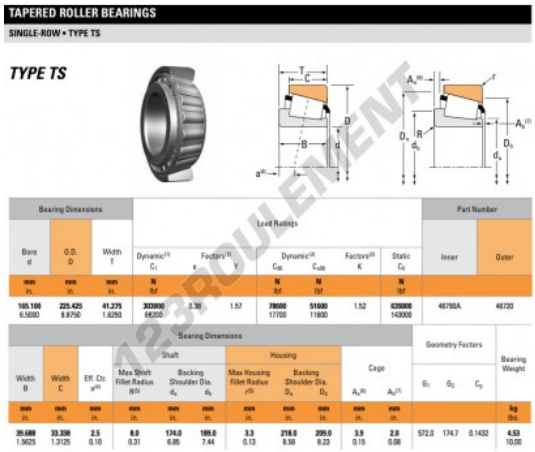

TAPERED ROLLER BEARINGS

SINGLE-ROW • TYPE TS

TYPE TS

Bearing Dimensions			Load Ratings							Part Number	
Bore d	O.D. D	Width T	Dynamic[1] C_1	Factors[1] e	Factors[1] Y	Dynamic[2] C_{90}	Dynamic[2] C_{u90}	Factors[2] K	Static C_0	Inner	Outer
mm / in.	mm / in.	mm / in.	N / lbf			N / lbf	N / lbf		N / lbf		
165.100 / 6.5000	225.425 / 8.8750	41.275 / 1.6250	303000 / 68200	0.38	1.57	78600 / 17700	51600 / 11600	1.52	635000 / 143000	46790A	46720

Bearing Dimensions											Geometry Factors			Bearing Weight
			Shaft			Housing			Cage					
Width B	Width C	Eff. Ctr. $a^{(4)}$	Max Shaft Fillet Radius $ra(5)$	Backing Shoulder Dia. d_a	d_b	Max Housing Fillet Radius $rb(5)$	Backing Shoulder Dia. D_a	D_b	A_w[6]	A_b[7]	G_1	G_2	C_p	
mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.				kg / lbs.
35.680 / 1.9625	33.338 / 1.3125	2.5 / 0.10	8.0 / 0.31	174.0 / 6.85	189.0 / 7.44	3.3 / 0.13	218.0 / 8.58	209.0 / 8.23	3.9 / 0.15	2.0 / 0.08	572.0	174.7	0.1432	4.53 / 10.00

123ROULEMENT

CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952326214
Diam. intérieur	165.1 mm
Diam. intérieur	6 1/2" inch
Diam. extérieur	225.425 mm
Diam. extérieur	8 7/8" inch
Epaisseur	41.275 mm
Epaisseur	1 5/8" inch
Conditionnement	1

contact@123roulement.ch
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE