


Roulement conique

EE127095-127135-TIMKEN - EE127095-127135-TIMKEN

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/ee127095-127135-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

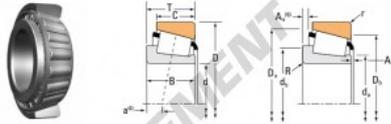

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | | |
|--------------------|---------|---------|---------------------------------------|-------------------------|-------------------------|--|-------------------------|-----------------------|-------------|----------|--------|
| Bore d | O.D. D | Width T | Dynamic ⁽¹⁾ C ₁ | Factor ⁽²⁾ e | Factor ⁽³⁾ Y | Dynamic ⁽⁴⁾ C ₀₂ | Factor ⁽⁵⁾ K | Static C ₀ | Inner | Outer | |
| mm | mm | mm | N | | | N | | N | | | |
| 241.200 | 349.148 | 57.150 | 60000 | 3.35 | 1.78 | 171900 | 193000 | 1.65 | 125000 | EE127095 | 127135 |
| 9.5000 | 13.1480 | 2.2160 | 148000 | | | 38500 | 22300 | | 263000 | | |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight | |
|--------------------|---------|--------------------------|---|--------------------------------------|---|--------------------------------------|-------------------------------|-------------------------------|------------------------------------|------------------|----------------|----------------|----------------|-------|
| Shaft | | | | | Housing | | | | | G ₁ | G ₂ | C ₃ | | |
| Width B | Width C | ER. Dr. α ⁽¹⁾ | Max. Shaft Fillet Radius R ⁽²⁾ | Backing Shoulder Dia. d ₄ | Max. Housing Fillet Radius r ⁽³⁾ | Backing Shoulder Dia. D ₁ | A ₁ ⁽⁴⁾ | A ₂ ⁽⁵⁾ | Cage A ₃ ⁽⁶⁾ | | | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | kg |
| 57.150 | 44.490 | 2.5 | 6.4 | 257.0 | 267.0 | 3.3 | 329.0 | 325.0 | 6.4 | 1.7 | 1176.6 | 184.4 | 0.1382 | 16.53 |
| 2.2500 | 1.7500 | 0.10 | 0.25 | 10.12 | 10.51 | 0.13 | 12.85 | 12.80 | 0.25 | 0.07 | | | | 36.44 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952328065 |
| Diam. intérieur | 241.122 mm |
| Diam. extérieur | 349.148 mm |
| Épaisseur | 57.15 mm |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE