Rotule SI
SIL80-ES-2RS-DURBAL - SIL80-ES-2RS-DURBAL

https://www.123roulement.ch/roulement-palier/rotule/si/sil80-es-2rs-durbal

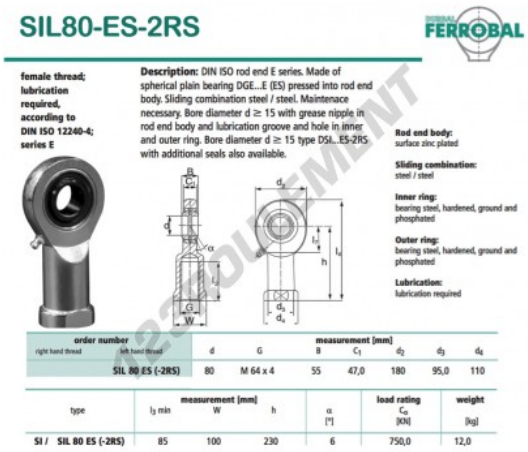

SIL80-ES-2RS

FERROBAL

female thread; lubrication required, according to DIN ISO 12240-4; series E

Description: DIN ISO rod end E series. Made of spherical plain bearing DGE...E (ES) pressed into rod end body. Sliding combination steel / steel. Maintenace necessary. Bore diameter d ≥ 15 with grease nipple in rod end body and lubrication groove and hole in inner and outer ring. Bore diameter d ≥ 15 type DSI...ES-2RS with additional seals also available.

Rod end body: surface zinc plated

Sliding combination: steel / steel

Inner ring: bearing steel, hardened, ground and phosphated

Outer ring: bearing steel, hardened, ground and phosphated

Lubrication: lubrication required

order number (right hand thread / left hand thread)	d	G	measurement [mm] B	C_1	d_2	d_3	d_4
SIL 80 ES (-2RS)	80	M 64 x 4	55	47,0	180	95,0	110

type	measurement [mm] l_3 min	W	h	α [°]	load rating C_0 [KN]	weight [kg]
SI / SIL 80 ES (-2RS)	85	100	230	6	750,0	12,0

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952497839
Diam. intérieur	80 mm
Diam. extérieur	180 mm
Epaisseur	55 mm
Type	SI
Poids	12000 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

contact@123roulement.ch
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE