# Rotule SA
# BEM5-8-20-501-DURBAL - BEM5-8-20-501-DURBAL

https://www.123roulement.ch/roulement-palier/rotule/sa/bem5-8-20-501-durbal

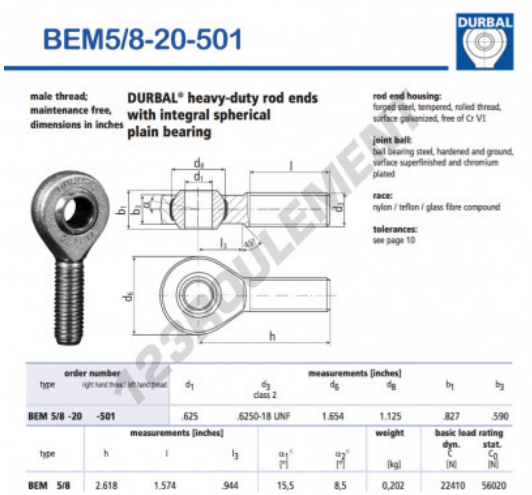

BEM5/8-20-501

DURBAL

male thread; maintenance free, dimensions in inches

DURBAL® heavy-duty rod ends with integral spherical plain bearing

rod end housing: forged steel, tempered, rolled thread, surface galvanized, free of Cr VI

joint ball: ball bearing steel, hardened and ground, surface superfinished and chromium plated

race: nylon / teflon / glass fibre compound

tolerances: see page 10

| order number type | right hand thread | left hand thread | measurements [inches] $d_1$ | $d_3$ class 2 | $d_6$ | $d_8$ | $b_1$ | $b_3$ |
|---|---|---|---|---|---|---|---|---|
| BEM 5/8 -20 | -501 | | .625 | .6250-18 UNF | 1.654 | 1.125 | .827 | .590 |

| type | measurements [inches] h | l | $l_3$ | $\alpha_1$ ° [°] | $\alpha_2$ ° [°] | weight [kg] | basic load rating dyn. C [N] | stat. $C_0$ [N] |
|---|---|---|---|---|---|---|---|---|
| BEM 5/8 | 2.618 | 1.574 | .944 | 15,5 | 8,5 | 0,202 | 22410 | 56020 |

## CARACTÉRISTIQUES PRODUIT

| | |
|---|---|
| Marque | DURBAL |
| N° Ean13 | 3663952510453 |
| Diam. intérieur | 15.88 mm |
| Diam. extérieur | 42.01 mm |
| Epaisseur | 21.01 mm |
| Type | SA |
| Poids | 202 g |
| Filetage | Filetage à droite |
| Lubrification | sans |
| Conditionnement | 1 |

contact@123roulement.ch
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE