
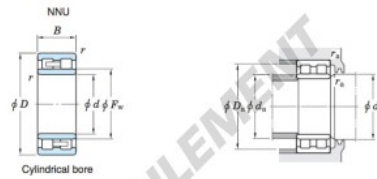


Roulement à rouleaux NNU4930-JTEKT - NNU4930-JTEKT

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/rouleaux/nnu4930-jtekt>

Double-row cylindrical roller bearings 



| Boundary dimensions (mm) | | | | Basic load ratings (kN) | | | Limiting speeds (min ⁻¹) | | Bearing No. | |
|--------------------------|-----|-----|-------------|-------------------------|-------|----------|--------------------------------------|----------|---------------------|-----------------|
| d | D | B | r min. | F_w | C_r | C_{0r} | Grease lub. | Oil lub. | Cylindrical bore | Tapered bore |
| 150 | 210 | 60 | 2 | 168.5 | 343 | 692 | 2 600 | 3 100 | | |

| Mounting dimensions (mm) | | Cylindrical bore | | Tapered bore | | Refer. Mass (kg) | |
|--------------------------|---------------|------------------|---------------|--------------|---|---------------------|-----------------|
| d_a min. | d_a max. | D_a min. | r_a max. | | | Cylindrical bore | Tapered bore |
| 159 | 166 | 171 | 201 | — | 2 | 6.50 | 6.22 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | JTEKT |
| N° Ean13 | 4549250031472 |
| Diam. intérieur | 150 mm |
| Diam. extérieur | 210 mm |
| Épaisseur | 60 mm |
| Poids | 6500 g |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE