


## Roulement conique 375S-374-TIMKEN - 375S-374-TIMKEN

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/375s-374-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

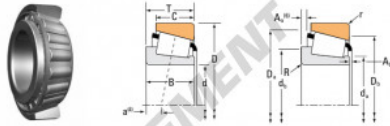

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> e	Factor <sup>3)</sup> Y	Dynamic <sup>4)</sup> C <sub>02</sub>	Factor <sup>5)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N			N	N	N			
50.800	93.264	20.638	19400	1.34	1.27	2700	15300	1.73	19100	375-S	374
2.0000	3.6718	0.8125	23600			6070	3020		22700		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. e <sup>1)</sup>	Max Shaft Fillet Radius R <sub>1</sub>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Fillet Radius r <sup>1)</sup>	Backing Shoulder Dia. D <sub>s</sub>	A <sub>1</sub> <sup>1)</sup>	A <sub>2</sub> <sup>1)</sup>	A <sub>3</sub> <sup>1)</sup>				kg	
22.225	15.880	-3.8	3.5	57.8	63.8	1.3	88.0	88.0	8.8	1.5	37.5	15.4	0.9818	0.89
0.8750	0.5858	-0.15	0.14	2.24	2.48	0.05	3.48	3.35	0.35	0.06				1.30

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952315935
Diam. intérieur	50.8 mm
Diam. intérieur	2" inch
Diam. extérieur	93.264 mm
Diam. extérieur	3.672" inch
Epaisseur	20.638 mm
Epaisseur	13/16" inch
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE