


## Roulement conique 575S-572-TIMKEN - 575S-572-TIMKEN

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/575s-572-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

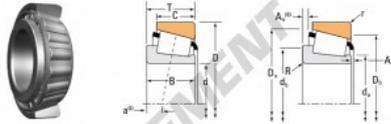

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Factor <sup>(3)</sup> f	Dynamic <sup>(1)</sup> C <sub>02</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N			N		N			
76.200	139.992	36.512	201900	2.40	1.48	63000	37100	1.45	291000	575-S	512
3.0260	5.5115	1.4375	48500			12100	6300		69400		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. a <sup>(1)</sup>	Max. Shaft Fillet Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>1</sub>	Cage A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>	A <sub>3</sub> <sup>(1)</sup>				kg	
36.088	26.575	-5.3	0.8	86.8	0.8	3.3	133.8	126.8	3.4	1.8	125.7	32.0	0.1265	2.32
1.4212	1.1200	-0.21	0.27	3.39	3.30	0.13	5.34	4.92	0.13	0.08				5.12

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952321608
Diam. intérieur	76.2 mm
Diam. extérieur	139.992 mm
Épaisseur	36.512 mm
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE