


## Roulement conique 659-653-TIMKEN - 659-653-TIMKEN

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/659-653-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

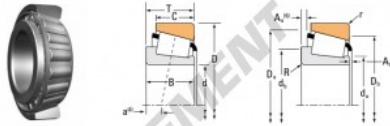

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> f	Dynamic <sup>3)</sup> C <sub>2</sub>	Factor <sup>4)</sup> K	Static C <sub>3</sub>	Inner	Outer		
mm	mm	mm	N		N		N				
76.200	146.050	41.275	247000	2.41	1.47	64000	40000	1.43	270000	008	003
3.0000	5.7500	1.0250	55500			14400	10700		75300		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>1</sub>		
Width B	Width C	ER. Dr. α <sup>1)</sup>	Max. Shaft Fillet Radius R <sup>2)</sup>	Backing Shoulder Dia. d <sub>4</sub>	Max. Housing Fillet Radius r <sup>3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	Cage A <sub>1</sub> <sup>4)</sup>	A <sub>2</sub> <sup>5)</sup>	A <sub>3</sub> <sup>6)</sup>				kg	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				
41.275	91.750	-2.8	3.5	87.8	0.8	3.3	139.8	131.8	4.5	2.1	136.6	27.3	0.0919	3.81
1.6250	1.2500	-0.31	0.14	3.43	3.05	0.13	5.47	5.16	0.17	0.08				6.83

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952321622
Diam. intérieur	76.2 mm
Diam. extérieur	146.05 mm
Épaisseur	41.275 mm
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE