


Roulement conique

H247540-H247510-TIMKEN - H247540-H247510-TIMKEN

https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/h247540-h247510-timken

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

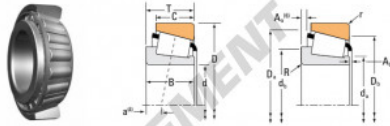

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width B	Dynamic ⁽¹⁾ C ₁	Factor ⁽²⁾ e	Static ⁽³⁾ C ₀	Factor ⁽⁴⁾ K	Dynamic ⁽⁵⁾ C ₉₀	Factor ⁽⁶⁾ K	Static ⁽⁷⁾ C ₀	Inner	Outer
mm	mm	mm	N		N		N		N		
219.975	384.175	112.712	192000	3.32	1.60	49800	29000	1.78	211000	H247540	H247510
6.6004	10.1250	4.4375	43200			11200	63700		69800		

Bearing Dimensions										Geometry Factors			Bearing Weight				
Shaft					Housing					Cage	G ₁	G ₂		C ₃			
Width B	Width C	ER. Dr. α ⁽¹⁾	Max. Shaft Fillet Radius R _{f1}	Backing Shoulder Dia. d _s	Max. Housing Fillet Radius r ₁ ⁽²⁾	Backing Shoulder Dia. D _s	A ₁ ⁽³⁾	A ₂ ⁽⁴⁾	A ₃ ⁽⁵⁾				mm		mm	mm	mm
112.712	96.488	-27.8	6.4	258.0	265.8	6.4	382.5	346.0	18.2	2.8	1984.4	148.4	0.1028	56.81	120.81		
4.4375	3.5625	-1.10	0.25	10.20	10.58	0.25	14.27	13.82	0.40	0.12							

CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952327488
Diam. intérieur	219.975 mm
Diam. extérieur	384.175 mm
Épaisseur	112.712 mm
Conditionnement	1

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE