


# Roulement conique H242649TD-H242610-TIMKEN - H242649TD-H242610-TIMKEN

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/h242649td-h242610-timken>

**TAPERED ROLLER BEARINGS**  
DOUBLE-ROW • TYPE TDIT

**TYPE TDIT**

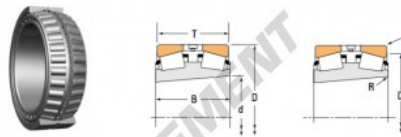

Bearing Dimensions				Load Ratings									
Bore d	Taper	O.D. D	Width T	Double Inner Ring Width B	Dynamic C <sub>10</sub>	e	Factor <sup>1)</sup> Y <sub>1</sub>	Y <sub>2</sub>	C <sub>0</sub>	Dynamic C <sub>90</sub>	C <sub>00</sub>	Factor <sup>2)</sup> K	
mm	°	mm	mm	mm	N				N	N	N		
206.375	1:12	336.558	180.975	184.150	223000	0.33	2.03	3.02	32200	19500	57000	1.78	
8.1250		13.200	7.1250	7.2800	501000				7460	4250	13000		

Part Number		Dimensions			Geometry Factors			Bearing Weight
Inner	Outer	Min Shaft Fillet Radius r <sub>s</sub>	Max Housing Fillet Radius r <sub>h</sub>	Backing Shoulder Dia. D <sub>s</sub>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>	
mm	mm	mm	mm	mm			kg	
H242649TD	H242610	1.5	3.3	206.8	1404.1	124.8	0.1465	45.01
		0.25	0.13	12.05				108.74

## CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952373294
Diam. intérieur	206.375 mm
Diam. extérieur	336.55 mm
Épaisseur	180.975 mm
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE