


Roulement à aiguilles GBRI82016-U-IKO - GBRI82016-U-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/aiguilles/gbri82016-u-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

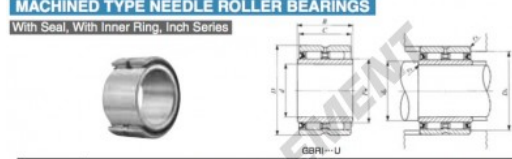

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>			
12.700 (1/2)	GBRI 82016 U		110	12.700 (1/2)	31.750 (1 1/4)	25.400 (1)			
<i>B</i>	<i>F_w</i>	Standard mounting dimensions mm		Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring		
		Min. <i>d_s</i>	Max. <i>D_s</i>					<i>r_{as max}</i> ⁽¹⁾	
25.650	19.050 (3/4)	17.5	18	27	0.6	26 400	34 500	4 000	LRBZ 81216

Notes: (1) Minimum allowable value of chamfer dimension *r*.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This roller ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383293
Diam. intérieur	12.7 mm
Diam. intérieur	1/2" inch
Diam. extérieur	31.75 mm
Diam. extérieur	1 1/4" inch
Epaisseur	25.4 mm
Epaisseur	1" inch
Conditionnement	1

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE