


## Roulement à aiguilles GBRI406028-UU-IKO - GBRI406028-UU-IKO

<https://www.123roulement.ch/roulement-palier/roulement-aiguilles/aiguilles/gbri406028-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

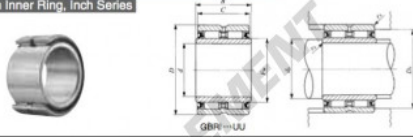

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
63.500 (2 1/2)	GBRI 406028 UU		1 140	63.500 $\pm 0.02$	95.250 $\pm 0.02$	44.450 $\pm 0.02$			
B	F <sub>w</sub>	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min.	Max.	D <sub>s</sub> Max.					r <sub>as max</sub> <sup>(1)</sup>
44.700	76.200 $\pm 0.03$	71	73	88	1.5	101 000	215 000	1 100	LRBZ 404828

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383569
Diam. intérieur	63.5 mm
Diam. extérieur	95.25 mm
Épaisseur	44.45 mm
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE