


## Galet de came avec axe CFE24-B-IKO - CFE24-B-IKO

<https://www.123roulement.ch/roulement-palier/roulement-bille/galet-came-axe/cfe24-b-iko>

**IKO**  
**CAM FOLLOWERS**  
Eccentric Type Cam Followers With Cage/With Hexagon Hole

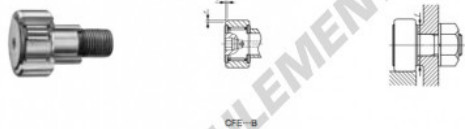

| Outside diameter of eccentric roller, mm | Identification number   |                             |                         |                             | Mass (Ref.) |    |    |                |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------|----|----|----------------|
|  | Shield type             |                             | Sealed type             |                             | g           | D  | C  | d <sub>e</sub> |
|  | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring |             |    |    |                |
| 33                                       | CFE 24 B                |                             |                         |                             | 895         | 62 | 29 | 33             |

| Boundary dimensions, mm |                |                  |                    |                |                |                |    |                  |                | Mounting dimension f, mm | Maximum splining torque, N·m | Basic dynamic load rating, C, N | Basic static load rating, C <sub>0</sub> , N | Maximum allowable static load, N |        |
|-------------------------|----------------|------------------|--------------------|----------------|----------------|----------------|----|------------------|----------------|--------------------------|------------------------------|---------------------------------|--|----------------------------------|--------|
| G                       | B <sub>3</sub> | B <sub>max</sub> | B <sub>1 max</sub> | B <sub>2</sub> | C <sub>1</sub> | G <sub>1</sub> | H  | H <sub>max</sub> | Excentricity e |                          |                              |                                 |  |                                  |        |
| M24×1.5                 | 25.5           | 30.6             | 80.1               | 49.5           | 0.8            | 8              | 24 | 12               | 1              | 0.8                      | 40                           | 215                             | 30 500                                       | 52 600                           | 52 000 |

### CARACTÉRISTIQUES PRODUIT

|                 |               |
|-----------------|---------------|
| Marque          | IKO           |
| N° Ean13        | 3616060459565 |
| Diam. intérieur | 33 mm         |
| Diam. extérieur | 62 mm         |
| Épaisseur       | 29 mm         |
| Conditionnement | 1             |

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE