


## Roulement à rouleaux NN3005K-JTEKT - NN3005K-KOYO

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/rouleaux/nn3005k-koyo>

### Double-row cylindrical roller bearings — Koyo

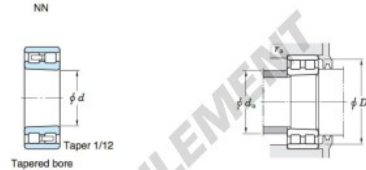

Boundary dimensions (mm)			Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.			
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> <sub>min</sub>	<i>F</i> <sub>w</sub>	<i>E</i> <sub>w</sub>	<i>C</i> <sub>r</sub>	<i>C</i> <sub>0r</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
25	47	16	0.6	—	41.3	25.7	30.0	14 000	17 000	—	NN3005K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d</i> <sub>a</sub>		<i>D</i> <sub>a</sub>		<i>r</i> <sub>a</sub>	Cylindrical bore	Tapered bore	
		min.	max.	min.	max.				
		29	—	—	43	42	0.127	0.123	

## CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473543
Diam. intérieur	25 mm
Diam. extérieur	47 mm
Épaisseur	16 mm
Poids	123 g
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE