

## Rotule TAPR GIHN-K-12LO-DURBAL - GIHN-K-12LO-DURBAL


<https://www.123roulement.ch/roulement-palier/rotule/tapr/gihn-k-12lo-durbal>

### GIHN-K-12LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

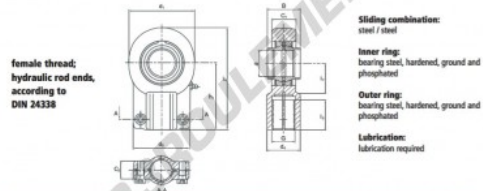

female thread:  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:  
steel / steel  
Inner ring:  
bearing steel, hardened, ground and  
phosphated  
Outer ring:  
bearing steel, hardened, ground and  
phosphated  
Lubrication:  
lubrication required

order number	d	d <sub>h</sub>	measurement [mm]				B	C <sub>1</sub>	C <sub>2</sub>
right hand thread			G	d <sub>h</sub>					
GIHN-K 12 LO*	12	32	M 12 x 1,25	16,5		32	12	11	11

type	l <sub>1</sub> min	measurement [mm]			load rating	weight
		h	l <sub>2</sub>	l <sub>1</sub>	C <sub>0</sub> [N]	[kg]
GIHN-K / GIHN-KL 12 LO*	17	38	54,0	14	24,5	0,10

## CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952500027
Diam. intérieur	12 mm
Diam. extérieur	32 mm
Épaisseur	11 mm
Type	TAPR
Poids	100 g
Filetage	Filetage à droite
Lubrification	avec
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE