

Rotule TAPR GIHN-K-20LO-DURBAL - GIHN-K-20LO-DURBAL


<https://www.123roulement.ch/roulement-palier/rotule/tapr/gihn-k-20lo-durbal>

GIHN-K-20LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

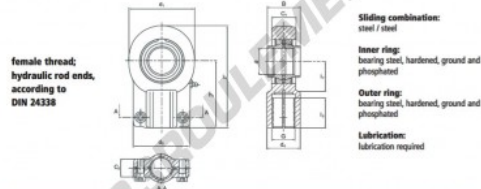

female thread:
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and
phosphated
Outer ring:
bearing steel, hardened, ground and
phosphated
Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]	G	d ₂	B	C ₁	C ₂
GIHN-K 20 LO	20	47	M 16 x 1,5	25,0	47	20	17	17

type	l ₁ min	measurement [mm]	l ₂	l ₁	load rating	weight
		h ₁	l ₂	l ₁	C ₀ [kN]	[kg]
GIHN-K / GIHN-KL 20 LO	23	52	77,0	22	48,0	0,40

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952500102
Diam. intérieur	20 mm
Diam. intérieur	0.787" inch
Diam. extérieur	47 mm
Diam. extérieur	1.85" inch
Epaisseur	17 mm
Epaisseur	0.669" inch
Type	TAPR
Poids	400 g
Filetage	Filetage à droite
Lubrification	avec
Conditionnement	1

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE