

Rotule TAPR GIHN-K-100LO-DURBAL - GIHN-K-100LO-DURBAL


<https://www.123roulement.ch/roulement-palier/rotule/tapr/gihn-k-100lo-durbal>

GIHN-K-100LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

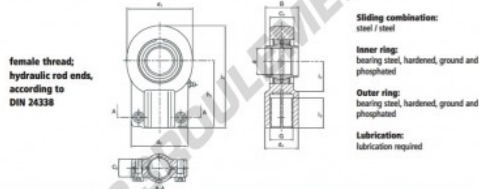

female thread:
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and
phosphated
Outer ring:
bearing steel, hardened, ground and
phosphated
Lubrication:
lubrication required

order number	d	d _h	measurement [mm]	G	d _h	B	C ₁	C ₂
GIHN-K 100 LO	100	210	M 80 x 3	110,0	178	100	84	62

type	l ₁ min	measurement [mm]	l ₁	load rating	weight
GIHN-K / GIHN-KL 100 LO	96	322,0	98	1060,0	28,00

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952500492
Diam. intérieur	100 mm
Diam. extérieur	210 mm
Épaisseur	84 mm
Type	-
Poids	28000 g
Filetage	-
Lubrification	-
Conditionnement	-

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE