


Roulement autre NN3014K-JTEKT - NN3014K-JTEKT

<https://www.123roulement.ch/roulement-palier/roulement-autre/nn3014k-jtekt>

Double-row cylindrical roller bearings 

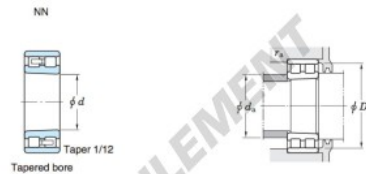

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.	
d	D	B	r min.	F_w	C_r	C_{0r}	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
70	110	30	1.1	100	96.9	148	5 500	6 500		NN3014K

		Mounting dimensions (mm)						(Refer.) Mass (kg)		
Cylindrical bore	Tapered bore	d_a		d_{a1}		D_a	r_a	Cylindrical bore	Tapered bore	
		min.	max.	min.	max.	min.				max.
		76.5	—	—	—	103.5	101	1	1.04	1.02

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952117379
Diam. intérieur	70 mm
Diam. extérieur	110 mm
Epaisseur	30 mm
Vitesse limite	6500 rpm
Poids	1020 g
Charge dynamique	96.9 kN
Charge statique	148 kN
Conditionnement	1
Norme	Sans norme

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE