


Roulement conique 30320-D-JTEKT - 30320-D-JTEKT

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/conique/30320-d-jtekt>

Single-row tapered roller bearings
metric series

Koyo

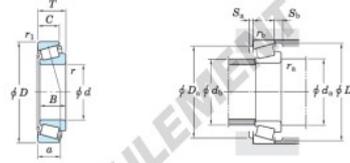

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min ⁻¹)		Bearing No. ¹⁾
d	D	T	B	C	C _r	C _{0r}	Grease lub.	Oil lub.	
100	215	51.5	47	34	318	374	1 500	2 100	30320D

Dimension series to ISO 355 (Refer. 1)	Load center (mm) a	Mounting dimensions (mm)								Constant e	Axial load factors		(Refer. 1) Mass (kg)	
		d _α min.	d _α max.	D _α min.	D _α max.	S _α min.	S _α max.	r _α min.	r _α max.		Y ₁	Y ₀		
—	65.9	118	121	201	183	204	5	17	3	2.5	0.81	0.74	0.41	8.02

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	4549250122415
Diam. intérieur	100 mm
Diam. intérieur	3.937" inch
Diam. extérieur	215 mm
Diam. extérieur	8.465" inch
Epaisseur	51.5 mm
Epaisseur	2.028" inch
Conditionnement	1

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE