


## Roulement à rouleaux NN3009K-JTEKT - NN3009K-JTEKT

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/rouleaux/nn3009k-jtekt>

Double-row cylindrical roller bearings ——— Koyo

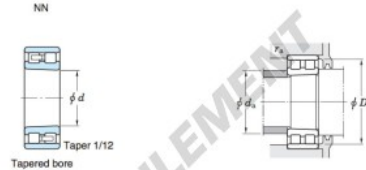

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> <sub>min</sub>	<i>F</i> <sub>0</sub>	<i>C</i> <sub>0</sub>	<i>C</i> <sub>10</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
45	75	23	1	—	87.5	53.4	71.9	8 300	9 900	NN3009K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d</i> <sub>a</sub>		<i>D</i> <sub>a</sub>		<i>r</i> <sub>a</sub>	Cylindrical bore	Tapered bore	
		min.	max.	min.	max.				
		50	—	—	70	69	1	0.404	0.382

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473628
Diam. intérieur	45 mm
Diam. extérieur	75 mm
Épaisseur	23 mm
Poids	382 g
Conditionnement	1

[contact@123roulement.ch](mailto:contact@123roulement.ch)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE