


Roulement à rouleaux NN3060-JTEKT - NN3060-JTEKT

<https://www.123roulement.ch/roulement-palier/roulement-rouleaux/rouleaux/nn3060-jtekt>

Double-row cylindrical roller bearings 

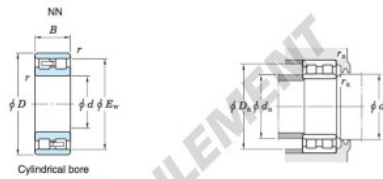

| Boundary dimensions (mm) | | | | Basic load ratings (kN) | | | Limiting speeds (min ⁻¹) | | Bearing No. | |
|--------------------------|-----|-----|---|-------------------------|----------------|-----------------|--------------------------------------|----------|------------------|--------------|
| d | D | B | r | F _w | C _r | C _{0r} | Grease lub. | Oil lub. | Cylindrical bore | Tapered bore |
| 300 | 460 | 118 | 4 | — | 418 | 1 290 | 2 460 | 1 100 | 1 300 | NN3060 |

| | | Mounting dimensions (mm) | | | | | | (Refer.) Mass (kg) | |
|------------------|--------------|--------------------------|------|----------------|------|----------------|------|--------------------|--------------|
| Cylindrical bore | Tapered bore | d ₂ | | D ₂ | | r ₂ | | Cylindrical bore | Tapered bore |
| | | min. | max. | min. | max. | min. | max. | | |
| | | 316 | — | — | 444 | 421 | 3 | 70.8 | 68.7 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | JTEKT |
| N° Ean13 | 3663952474007 |
| Diam. intérieur | 300 mm |
| Diam. extérieur | 460 mm |
| Épaisseur | 118 mm |
| Poids | 70800 g |
| Conditionnement | 1 |

contact@123roulement.ch

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE